




LED SHOP LIGHT

Model Number

XTSL-40121-001

Features

- ◎ Use high brightness high CRI SMD 2835 chip, life span 50,000 hours, 5 Years Guarantee
- ◎ 100-277VAC Widely input Voltage
- ◎ 20pcs series connection allowed per time
- ◎ Use special aluminum composite structure design, the light Angle >120 degrees

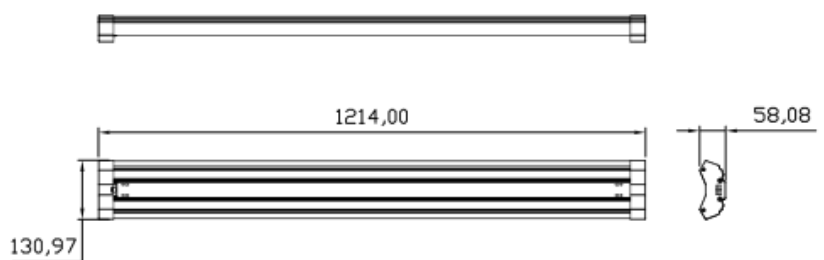


SPECIFICATION

Web: www.xinxuantech.com

Tel: 0755-89487497

Add: WeiXing industry Park, NO.268-3 BaoShi East road, ShuiTian community, ShiYan Town, ShenZhen, China.

Basic parameter



Shenzhen Xinxuan Technology CO Ltd

Item Number	LED Type	IP Grade	Color	Material	N.W.
XTSL-40121-001	SMD2835/240PCS	IP20	white	ALPMMA+PC	1.3kgs


Electrical parameter

Model	Power	Input voltage	Efficiency(%)	Power Factor	Dimming	Certificate
XTSL-40121-001	40W	100-277VAC 50-60Hz	≥89%	> 0.9	NO	ETL DLC FCC

Optical parameter

Model	CCT(K)	Luminous Efficiency	Beam angle	Rendering Index
XTSL-40121-001	2700-6500K	>100LM/W	>120	>80

Photometrics

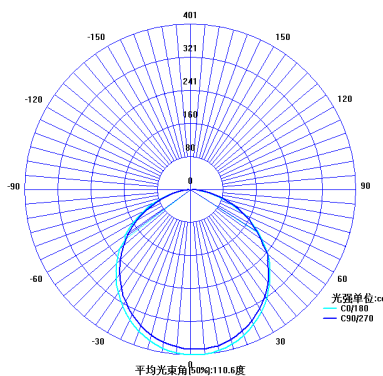

Storage Conditions

Storage temperature	-20°C~+65°C
Operating temperature	-20°C~+45°C (the best in 25°C)
Environment humidity	40-90%RH

Life and Warranty

Life Span	50,000H(Luminance decrease is less than 30%)
Quality Warranty	5 years

Packaging



Shenzhen Xinxuan Technology CO Ltd

Model	Materials	Carton size (mm)	Qty (PCS)	N. W (KG)	Carton weight (KG)
XTSL-40121-001	Hard paper box	L1255*W168*H93mm	1	1.53	1.53
		L1270*W485*H185mm	5		8.27

Instruction

1. Please read the product specification carefully, and confirm the use environment is in line with the specifications of the book, on the condition of before install and use.
2. Before the product is plugged into a power supply, please ensure the switch is in off state.
3. Lamps and lanterns should be installed by a qualified electrician, electrical wiring conforms to the IEE standards or national standards;
4. This product is suitable for indoor.
5. Do not under the condition of voltage too high or too low, use for a long time, will affect the normal use function and life;
6. Not installed in the fuel use, no matter what circumstances, lamps and lanterns can't are covered with insulating material or similar material.
7. When install, replace, clean lamps and lanterns, must cut off power supply, ensure the personal safety;
8. When found abnormal work of lamps and lanterns (self-extinguishing, flash), please check the attachment plug contact performance, and the power supply voltage is normal, if normal, fault has not ruled out, need to change the new light;
9. Need to clean the surface of lamps and lanterns, please disconnect the power supply! Dry with soft cloth glued soapy water after cleaning, wipe with dry cloth again, please don't use banana oil wait to wipe the surface of lamps and lanterns of volatile substances, please do not spraying the lamps and lanterns of any chemicals, lamps and lanterns may change color or otherwise damage.
10. Please do not disassemble the product itself, so as not to damage the internal components. Removed or cannot enjoy the warranty service.

